

STANDARD AGM SERIES RANGER 6TAGM

- **Voltage:** 12V
- **Reserve Capacity:** 120Ah@20hr rate
- **Reserve Capacity:** 230 min @ 25A
- **Cold Cranking Amps:** 1100
- **Weight:** 90 lbs (40.75 kg)
- **Length:** Base: 10 in (254 mm)
Handles: 9.05 in (230 mm)
- **Width:** 10.59 in (269 mm)
- **Height:** 9.055 in (230 mm)
- **Float Voltage:** 2.27 V per cell @ 77°F (25°C)
- **Terminals:** 1/4-20 UNC bolt (torque 110 in-lbs / 12.4 N-m)



C&D RANGER 6TAGM BATTERY

With over 5.5 million batteries sold yearly in over 120 countries, C&D Technologies is a world leader in energy storage solutions. The Ranger 6TAGM battery delivers high performance and reliability for military-style and power sports vehicles.

MODEL **RANGER 6TAGM**
 VOLTAGE **12V**
 CAPACITY **120 AH @ 100 HR RATE 77F**
 BATTERY TYPE **AGM / VRLA**

12V

RANGER 6TAGM




AGM / VRLA — SPECIFICATIONS

PRODUCT + PHYSICAL SPECIFICATIONS

Serie	Model	Voltage	Capacity AH@C20	Cold Cranking Amps CCA	Reserve Capacity MIN@25A	Dimensions ^c Inches (mm)			Weight Lbs. (kg)
STANDARD AGM	RANGER 6TAGM	12	120	1100	230	Length	Width	Height ^F	90 (40.75)
						11.26 (286)	10.59 (269)	9.05 (230)	

RANGER 6TAGM

AGM / VRLA — DIMENSIONS

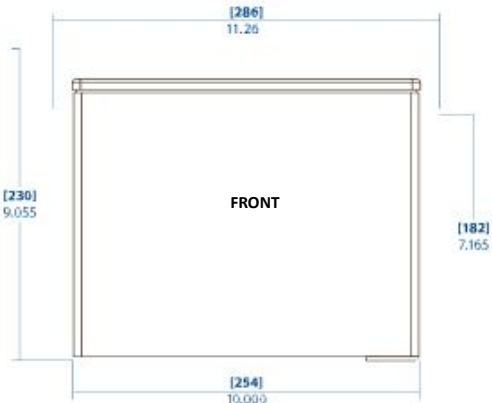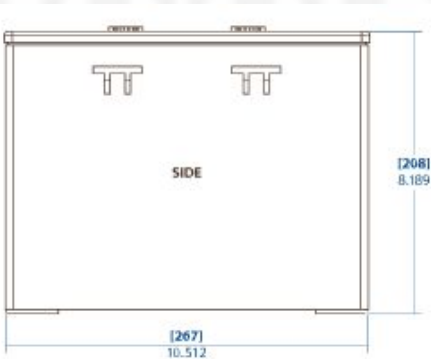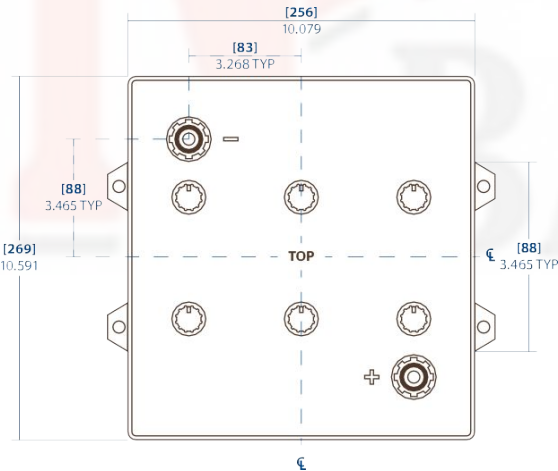

RANGER 6TAGM



FEATURES / BENEFITS



HIGH STARTING POWER:
Powerful Cold Cranking
Amps significantly reduce
engine start up wear and
tear and improve engine
efficiency and lifespan



UNMATCHED RELIABILITY:
Our batteries are designed
for durability in extreme
temperatures and
demanding environments



MAINTENANCE FREE:
AGM/VRLA technology
requires no service and
comes with safety features
like a flame arrestor and
leak proof all-welded
construction for longer life



LONG SHELF LIFE:
Even when not in use,
expect the longest battery
life and, therefore,
reduced lifetime
replacement costs thanks
to AGM/VRLA technology